



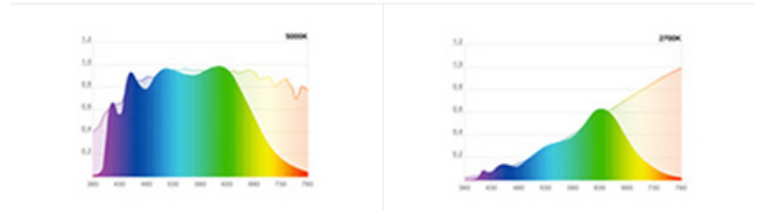

SKY- Series

Round Recessed "Skylight"

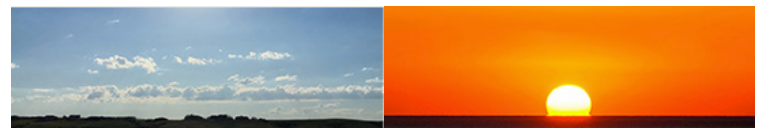

Standard

Specification-grade, recessed, drywall luminaire provides soft, glare-free luminous sky-scape with ultra modern styling and high visual comfort. When combined with dynamic 2-channel LED light engines, the luminaire dynamically shifts from daytime spectrum to night spectrum to complement people's natural sleep /wake cycle.

Light Source (Boards designed and manufactured in U.S.A.)

Seoul Semi Sunlike Chipset

Daytime 5000K 92 MP Ratio / NightTime 2700K .43 MP Ratio

Lumens: 12500 Lm Daytime / 10,500 Lm Nighttime

CRI: 95 min.

R9: 85

Color Chromaticity: SDCM 3 step

LPW: 130 +/-

Optics:

Glare free concave lens, acrylic. Flat lens optional

Electrical (Driver designed and manufactured in U.S.A.)

2 Channel, NFC programmable driver with dual 0-10V inputs

UL Recognized 1310 Class 2 / 8750

FCC Listed Part 15 Class A

Short circuit protection, over temperature protection and output over voltage protection.

Voltage: 100-277 VAC, 50/60 Hz, PF: >.9 THD: <20%

Consumption: 96W Daytime / 80W Nighttime

Control Protocol: Dual 0-10V inputs (intensity, cross fade)

Dimming Range: <5%

Mechanical

Die Formed, post painted powder coated steel

Access plate for quick wiring

Diffuser held in place with springs for easy installation

54 Pounds

Series	Size	Optics	Channel 1	Channel 2	Lumens	Options
SKY	11 1x1 22 2x2 33 3x3 44 4x4	CC Concave Acrylic FL Flat Acrylic CV Convex Acrylic	SNLK50 Seoul Semi Sunlike 5000K	SNLK27 Seoul Semi Sunlike 2700K	X	EM Emergency Nlite Nlite controllable TG T-bar Grid Installation Kit

Apres Illumination, LLC 536 Village Circle Blue Bell, PA 19422

Tellmemore@apresillumination.com

www.apresillumination.com